

2-WIRE PROGRAMMABLE TRANSMITTER



- **TC input**
- **High measurement accuracy**
- **Galvanic isolation**
- **Programmable sensor error value**
- **For DIN form B sensor head mounting**

Application:


- Linearised temperature measurement with TC sensor.
- Amplification of bipolar mV signals to a 4...20 mA signal, optionally linearised according to a defined linearisation function.

Technical characteristics:

- Within a few seconds the user can program 5334A3B to measure temperatures within all TC ranges defined by the norms.
- Cold junction compensation (CJC) with a built-in temperature sensor.
- Continuous check of vital stored data for safety reasons.

Mounting / installation:


- For DIN form B sensor head mounting.

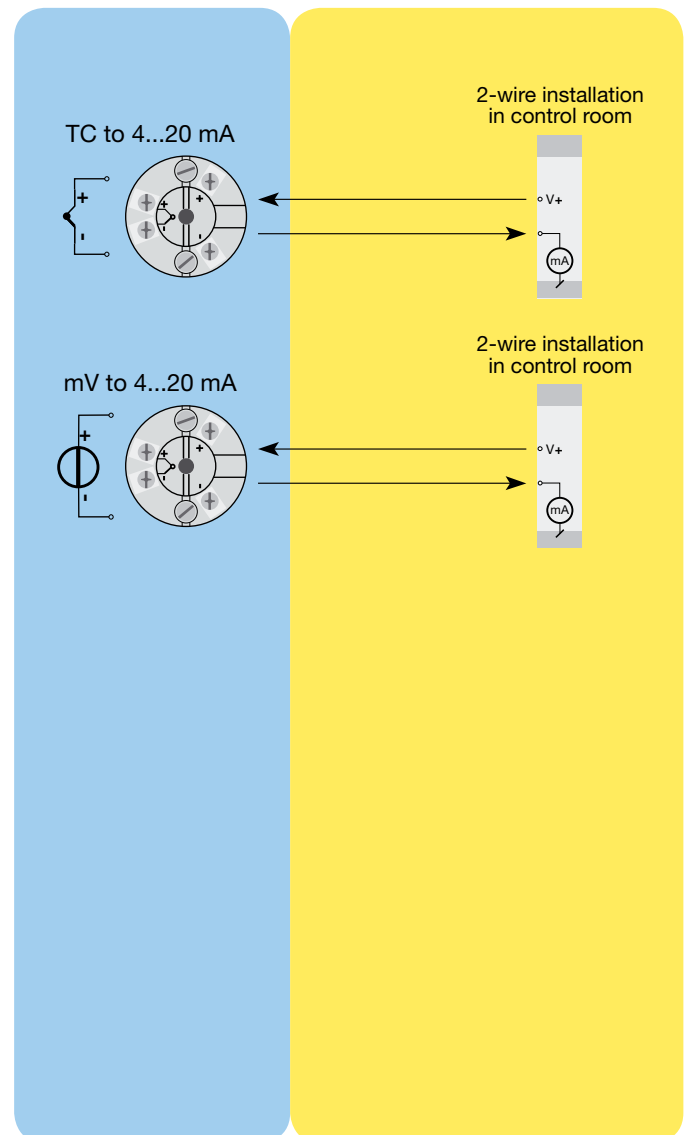

Order: 5334A3B

| Type | Version |
|------|---------|
| 5334 | A3B |

Connections:

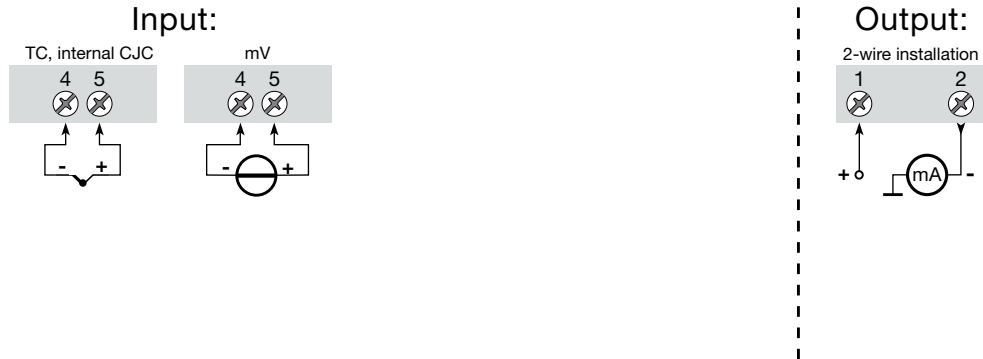

Electrical specifications:

Specifications range:

-40°C to +85°C

Common specifications:

- Supply voltage, DC 7.2...30 VDC
 - Internal consumption..... 25 mW...0.8 W
 - Voltage drop 7.2 VDC
 - Isolation voltage, test / operation..... 1.5 kVAC / 50 VAC
 - Warm-up time..... 5 min.
 - Communications interface Loop Link
 - Signal / noise ratio..... Min. 60 dB
 - Response time (programmable) 1...60 s
 - EEProm error check..... < 3.5 s
 - Signal dynamics, input 18 bit
 - Signal dynamics, output..... 16 bit
 - Calibration temperature..... 20...28°C
- Accuracy, the greater of general and basic values:

TC input:

| Type | Min. temperature | Max. temperature | Min. span | Standard |
|------|------------------|------------------|-----------|--------------|
| B | +400°C | +1820°C | 100°C | IEC584 |
| E | -100°C | +1000°C | 50°C | IEC584 |
| J | -100°C | +1200°C | 50°C | IEC584 |
| K | -180°C | +1372°C | 50°C | IEC584 |
| L | -100°C | +900°C | 50°C | DIN 43710 |
| N | -180°C | +1300°C | 50°C | IEC584 |
| R | -50°C | +1760°C | 100°C | IEC584 |
| S | -50°C | +1760°C | 100°C | IEC584 |
| T | -200°C | +400°C | 50°C | IEC584 |
| U | -200°C | +600°C | 50°C | DIN 43710 |
| W3 | 0°C | +2300°C | 100°C | ASTM E988-90 |
| W5 | 0°C | +2300°C | 100°C | ASTM E988-90 |
| LR | -200°C | +800°C | 50°C | GOST 3044-84 |

Cold junction compensation < ±1.0°C

Current output:

- Signal range 4...20 mA
- Min. signal range 16 mA
- Updating time..... 440 ms
- Load resistance ≤ (V_{supply} - 7.2) / 0.023 [Ω]

Sensor error detection:

- Programmable..... 3.5...23 mA
- NAMUR NE43 Upscale..... 23 mA
- NAMUR NE43 Downscale..... 3.5 mA

| General values | | |
|----------------|-------------------|-------------------------|
| Input type | Absolute accuracy | Temperature coefficient |
| All | ≤ ±0.05% of span | ≤ ±0.01% of span / °C |

| Basic values | | |
|---------------------------------|----------------|-------------------------|
| Input type | Basic accuracy | Temperature coefficient |
| Volt | ≤ ±10 μV | ≤ ±1 μV / °C |
| TC type: E, J, K, L, N, T, U | ≤ ±1°C | ≤ ±0.05°C / °C |
| TC type: B, R, S, W3, W5, LR | ≤ ±2°C | ≤ ±0.2°C / °C |

| | |
|--|-----------------|
| EMC immunity influence | < ±0.5% of span |
| Extended EMC immunity: NAMUR NE 21, A criterion, burst..... | < ±1% of span |

- Effect of supply voltage variation < 0.005% of span / VDC
- Vibration IEC 60068-2-6 Test FC
- Lloyd's specification no. 1..... 4 g / 2...100 Hz
- Max. wire size..... 1 x 1.5 mm² stranded wire
- Humidity < 95% RH (non-cond.)
- Dimensions..... Ø 44 x 20.2 mm
- Protection degree (encl. / terminal) ... IP68 / IP00
- Weight 50 g

Electrical specifications, input:

Max. offset..... 50% of selec. max. value

Voltage input:

- Measurement range -12...150 mV
- Min. span..... 5 mV
- Input resistance..... 10 MΩ